Wireless LAN



LANCOM LX-6402

Highly efficient Wi-Fi 6 for complex environments

Wi-Fi radio networks belong to all areas of life today. Whether office environments, schools, universities, shopping centres, sports stadiums or event locations, no area can do without Wi-Fi. This Wi-Fi 6 access point offers low latency times and high throughput per client even with high terminal device density. External Wi-Fi antenna connectors cater for targeted coverage in complex environments. You can therefore trust the possibilities of High Efficiency Wireless – Made by LANCOM.

- > Dual concurrent Wi-Fi parallel operation at 2.4 GHz and 5 GHz with Wi-Fi 6 (IEEE 802.11ax)
- > 4x4 multi-user MIMO for simultaneous beam-steering for multiple clients (up- and downlink)
- > OFDMA for efficient Wi-Fi channel usage
- > Significantly longer battery life thanks to TWT
- > Includes 4 flexibly adjustable omni-directional antennas, alternatively connection of optional sector antennas
- > Support of the security standard WPA3
- > Zero-touch deployment with a LANCOM WLAN controller or LANCOM Management Cloud
- > Power supply optionally by Power over Ethernet (IEEE 802.3at) or power-supply unit (included)
- > 1x 2.5-Gigabit Ethernet PoE port (IEEE 802.3at for up to 30 Watt), 1x Gigabit Ethernet port



LANCOM LX-6402

Dual concurrent Wi-Fi with an aggregated datarate of up to 3,550 Mbps

The LANCOM LX-6402 offers the Wi-Fi 6 standard (IEEE 802.11ax) for high-speed wireless LAN for clients in the 2.4and 5-GHz bands. Wi-Fi 6 technology achieves transmission rates of up to 2.400 Mbps at 5 GHz and simultaneously up to 1.150 Mbps at 2.4 GHz.

4x4 Multi-User MIMO for downlinks and uplinks

Multi-user MIMO (MU-MIMO for short) simultaneously distributes all of the available spatial streams of the LANCOM LX-6402 between several different clients, rather than one after the other as was formerly the case. The available bandwidth is used efficiently and delays in the wireless network are substantially reduced. With Wi-Fi 6, MU-MIMO operates not only for the downlink but for the uplink as well.

OFDMA – carpooling in the radio field

Orthogonal Frequency Division Multiple Access (OFDMA) divides the frequency range of a Wi-Fi channel into a number of frequency blocks per unit of time. This creates subcarriers, which can be as narrow as just 2 MHz. Small data packets, so typical of IoT devices, no longer block entire 20-, 40- or even 80-MHz channels all by themselves. On the other hand, the Wi-Fi 6 access point is able to bundle multiple subcarriers. This is bit like carpooling, which stops the traffic being blocked by cars with just one occupant: Instead, the streets are freed up with just a few cars carrying several occupants.

160 MHz channel width

The access point can handle channel bandwidths of 20, 40, and 80 MHz (with 4 streams) and 160 MHz (with 2 streams). The channel width of 160 MHz enables a data throughput of up to 2.400 Mbps on appropriate terminals with two antennas that support the reception of two streams at 160 MHz in the 5 GHz frequency band.

Longer battery life thanks to TWT

Previously, smartphones, tablets and notebooks had to be ready to receive all the time so as not to miss their data packets. This can quickly use up battery charge. Wi-Fi 6 delivers a new technology to counteract power consumption on the client side. Target Wake Time, TWT for short, reduces consumption by allowing the access point and the client to negotiate exactly when the receiver should wake up to receive data packets.

Band steering

Optimized load balancing in your Wi-Fi by actively redirecting clients to the less congested and higher performance 5-GHz frequency band.

Operates via the LANCOM Management Cloud

The LANCOM LX-6402 offers unsurpassed user-friendliness: Managed through the LANCOM Management Cloud, it integrates into a holistic, automated network orchestration system based on software-defined networking technology.

Wi-Fi security standard WPA3

WPA3, the successor of WPA2, offers important upgrades and security features for small ("WPA3-Personal") and large networks ("WPA3-Enterprise").



LANCOM LX-6402

LCOS LX 5.30

| Wi-Fi product specification | | | | |
|--|---|--|--|--|
| Frequency band 2.4 GHz and 5 GHz | 2400-2483.5 MHz (ISM), 5150-5700 MHz (depending on country-specific restrictions) | | | |
| Data rates IEEE 802.11ax | > up to 2400 MBit/s according to IEEE 802.11ax with MCS11/QAM-1024 at 5 GHz, 4x4 MIMO and 80 MHz channel width or 2x MIMO and 160 MHz channel width > up to 1150 MBit/s according to IEEE 802.11ax with MCS11/QAM-1024 at 2.4 GHz, 4x4 MIMO and 40 MHz channel width | | | |
| Data rates IEEE 802.11ac/n | 867 Mbps according to IEEE 802.11ac with MCS9 (fallback to 6.5 Mbps with MCS0). | | | |
| Data rates IEEE 802.11n | 300 Mbps according to IEEE 802.11n with MCS15 (fallback to 6.5 Mbps with MCS0). | | | |
| Data rates IEEE 802.11a/ h | 54 Mbps (fallback to 48, 36, 24, 18, 12, 9, 6 Mbps, Automatic Rate Selection), fully compatible with TPC (adjustable power out) and DFS (automatic channel selection, radar detection) | | | |
| Data rates IEEE 802.11b/g | 54 Mbps to IEEE 802.11g (fallback to 48, 36, 24, 18, 12, 9, 6 Mbps, Automatic Rate Selection) | | | |
| Radio channels 5 GHz | Up to 16 non-overlapping channels (available channels and further obligations such as automatic DFS dynamic channel select depending on national regulations), configurable maximum transmit power | | | |
| Radio channels 2.4 GHz | Up to 13 channels, max. 3 non-overlapping (depending on country-specific restrictions), configurable maximum transmit power | | | |
| Multi-SSID | Up to 32 (simultaneous use of up to 16 independent Wi-Fi networks at WLAN interface 1 and up to 16 independent Wi-Fi netw at WLAN interface 2); time-controlled activation and deactivation of Wi-Fi networks | | | |
| Concurrent Wi-Fi clients | Up to 511 clients | | | |
| Hotspot | Support for the Cloud-managed Hotspot in combination with the LANCOM Management Cloud | | | |
| Supported Wi-Fi standards | | | | |
| IEEE standards | IEEE 802.11ax, IEEE 802.11ac Wave 2, IEEE 802.11n, IEEE 802.11a, IEEE 802.11g, IEEE 802.11b, IEEE 802.11i, IEEE 802.1X, IEE 802.11h, IEEE 802.11d, IEEE 802.11v | | | |
| Standard IEEE 802.11ax | | | | |
| Supported features | 4x4 DL-/UL-MU-MIMO, DL-/UL-OFDMA, triggered target-wake-time, BSS coloring, QAM-1024, 80 MHz channels, 160 MHz channels | | | |
| Standard IEEE 802.11ac | | | | |
| Supported features | 4x4 MIMO, 80 MHz channels, 160 MHz channels, MU-MIMO, QAM-256 | | | |
| Standard IEEE 802.11n | | | | |
| Supported features | 4x4 MIMO, 40-MHz channels, 20/40MHz coexistence mechanisms in the 2.4 GHz band, MAC aggregation, Block Acknowledgemen STBC (Space Time Block Coding), LDPC (Low Density Parity Check), MRC (Maximal Ratio Combining), Short Guard Interval | | | |
| Operating modes | | | | |
| Modes | Standalone, WLC-managed or LANCOM Management Cloud managed | | | |
| Wi-Fi security | | | | |
| Encryption options | IEEE 802.1X (WPA3-Enterprise, WPA2-Enterprise), WPA3-Personal, IEEE 802.11i (WPA2-Personal), WEP, LEPS-U (Private PSK), LEPS-MA | | | |
| Encryption algorithms | AES-CCMP, AES-GCMP, TKIP, RC4 | | | |
| EAP types (authenticator) | EAP-TLS, EAP-TTLS/MSCHAPv2, PEAPv0/EAP-MSCHAPv2, PEAPv1/EAP-GTC, EAP-FAST | | | |
| Roaming | | | | |
| Roaming | IAPP (Inter Access Point Protocol), Fast Roaming (802.11r) | | | |
| LANCOM Active Radio Control | | | | |
| Band Steering | Steering of 5GHz clients to the corresponding high-performance frequency band; support for 802.11v | | | |
| Bluetooth Low Energy (BLE) | | | | |
| iBeacon* | Support for iBeacon. The UUID as well as the major and minor ID are configurable. On top of that, all three radiated powers as supported (near, immediate, far). | | | |
| Support of Bluetooth Low Energy technology (BLE) | The device can scan the environment for BLE devices and can forward the resulting scan data via a REST API. | | | |
| *) Notice | support through future software update | | | |
| Layer 2 functions | | | | |
| VLAN | 4096 VLAN IDs, static assignment to SSIDs, dynamic Assignment via LEPS-U/LEPS-MAC or 802.1X (RADIUS) | | | |



LANCOM LX-6402

LCOS LX 5.30

| Layer 2 functions | | | | |
|-----------------------------------|---|--|--|--|
| Quality of Service | WME based on IEEE 802.11e | | | |
| Bandwidth limitation | Per SSID | | | |
| Interfaces | | | | |
| Ethernet ports | 1x 10/100/1000/2.5GBASE-T (RJ-45), PoE (Power over Ethernet) 1x 10/100/1000BASE-T (RJ-45), IEEE 802.3az | | | |
| USB 3.0 host port | USB 3.0 host port (USB-A) | | | |
| external antennas | All four external antennas are used by both radio modules via an internal diplexing cirtuit | | | |
| Supported IoT Modules | | | | |
| IoT USB modules | LANCOM Wireless ePaper USB | | | |
| Hardware | | | | |
| Power supply | 12 V DC, external power adapter (230 V), PoE (Power over Ethernet), compliant with IEEE 802.3at | | | |
| Power consumption | max. 22W via 12V power adapter; max. 24W via PoE 802.3at; idle power consumption approx. 8W | | | |
| Environment | Temperature range 0–40 °C. Humidity 0–90 %; non-condensing | | | |
| Housing | Robust synthetic housing with aluminum bottom, rear connectors, ready for wall mounting, Kensington lock; 205 x 42 x 205 mm (W x H x D) | | | |
| Management and monitoring | | | | |
| Management | LANCOM Management Cloud, WLAN-Controller, WEBconfig, LANconfig, external Syslog, Packet Capturing | | | |
| Monitoring | LANCOM Management Cloud, WLAN-Controller, WEBconfig, LANmonitor, SNMP | | | |
| Declarations of Conformity | | | | |
| CE | EN 62311:2008, EN 60601-1-2:2015, EN 55032:2015/AC:2016, EN 55035:2017, EN 62368-1:2014+A11:2017, EN 301 489-1 V2.2.3 EN 301 489-17 V3.2.2, EN 300 328 V2.2.2, EN 301 893 V2.1.1 | | | |
| FCC | FCC Part 15B, 15C, 15E | | | |
| Country of Origin | Software designed in Germany, Assembled in Malaysia | | | |
| Scope of delivery | | | | |
| Documentation | Installation Guide (DE/EN); Mounting Instructions (DE/EN) | | | |
| Cable | Ethernet cable, 3 m | | | |
| Power supply unit | External power adapter (100-240 V), 12 V/2,5A DC, EU plug (not included in bulk delivery) | | | |
| Accessories | | | | |
| LANCOM PoE++ Injector | 1-port PoE injector with up to 5 Gigabit support, integrated power supply, compatible with the standard IEEE 802.3af/at/bt (up to 65W), item no. 61779 (EU) | | | |
| Support | | | | |
| Software updates | Regular free updates | | | |
| Options | | | | |
| LANCOM Warranty Basic Option S | Option to extend the manufacturer's warranty from 3 to 5 years, item no. 10710 | | | |
| LANCOM Warranty Advanced Option S | Option to extend the manufacturer's warranty from 3 to 5 years and replacement of a defective device, item no. 10715 | | | |
| LANCOM Management Cloud | | | | |
| LANCOM LMC-A-1Y LMC License | LANCOM LMC-A-1Y License (1 Year), enables the management of one category A device for one year via the LANCOM Managemen Cloud, item no. 50100 | | | |
| LANCOM LMC-A-3Y LMC License | LANCOM LMC-A-3Y License (3 Years), enables the management of one category A device for three years via the LANCOM Management Cloud, item no. 50101 | | | |
| LANCOM LMC-A-5Y LMC License | LANCOM LMC-A-5Y License (5 Years), enables the management of one category A device for five years via the LANCOM Managemen Cloud, item no. 50102 | | | |




LCOS LX 5.30

LANCOM LX-6402

| Item number(s) | | | |
|------------------------------|-------|--|--|
| LANCOM LX-6402 (EU) | 61825 | | |
| LANCOM LX-6402 (WW) | 61826 | | |
| LANCOM LX-6402 (US) | 61827 | | |
| LANCOM LX-6402 (WW, Bulk 10) | 61828 | | |

| transmit power and receiver sensitivity | | | | | | | |
|---|----------------------|-----------|------------------|-------------------------------|----------------------|--|--|
| | | per chain | four MIMO chains | including internal antenna | receiver sensitivity | | |
| 802.11b (2,4 GHz) | 1 Mbps | 17 | 23 | 25 | -102 | | |
| | 11 Mbps | 17 | 23 | 25 | -95 | | |
| 802.11g (2,4 GHz) | 6 Mbps | 17 | 23 | 25 | -97 | | |
| | 54 Mbps | 15 | 21 | 23 | -83 | | |
| 802.11n (2,4 GHz) | MCS0 HT20 | 17 | 23 | 25 | -95 | | |
| | MCS7 HT20 | 15 | 21 | 23 | -78 | | |
| 802.11ax (2,4 GHz) | MCS9 HE40 | 14 | 20 | 22 | -72 | | |
| | MCS11 HE40 (2,4 GHz) | 11 | 17 | 19 | -66 | | |
| 802.11a (5 GHz) | 6 Mbps | 17 | 23 | 25 | -97 | | |
| | 54 Mbps | 16 | 22 | 24 | -82 | | |
| 802.11n (5 GHz) | MCS0 HT20 | 17 | 23 | 25 | -97 | | |
| | MCS7 HT20 | 16 | 22 | 24 | -83 | | |
| 802.11ax (5 GHz) | MCS9 HE80 | 13 | 19 | 21 | -71 | | |
| | MCS11 HE80 | 10 | 16 | 18 | -66 | | |
| | MCS9 HE160 | 11 | 17 | 19 | -65 | | |
| | MCS11 HE160 | 10 | 16 | 18 | -59 | | |

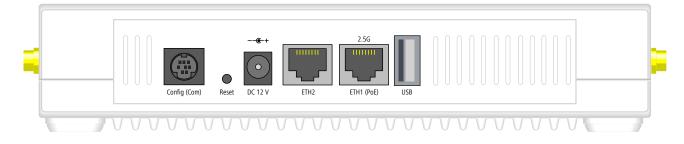



www.lancom-systems.com