



LANCOM 1640E

For reliable VPN connectivity and versatile Internet access

For securely connecting small and mid-sized businesses as well as individual mobile employees to the company headquarters, a reliable business VPN router is required. The LANCOM 1640E supports award-winning IPSec VPN and connects to any DSL or cable modem to offer maximum independence of the available Internet lines at the site. Due to SD-WAN via the LANCOM Management Cloud the configuration and the roll-out take place fully automatized.

- Gigabit Ethernet interface for connection to DSL or cable modems
- 3 integrated IPSec VPN channels
- Network virtualization for 2 networks (ARF)
- Integrated stateful-inspection firewall with intrusion detection and Denial-of-Service protection
- Security Made in Germany
- Maximum future compatibility, reliability, and security

LANCOM 1640E

Award-winning LANCOM VPN

Thanks to 3 integrated IPsec VPN channels, the LANCOM 1640E offers secure encryption for the link to the company headquarters. At the same time it provides mobile employees with secure access to internal company data. By the way: LANCOM VPN solutions were once again awarded the title "Champion" in the category "Professional User Rating: Security Solutions" (PUR-S).

High-speed Internet via external modems

The LANCOM 1640E is a business VPN router that connects to external modems via the Gigabit Ethernet port, providing highest independence from the available Internet lines at the site.

Maximum data security from its integrated firewall

Equipped with a stateful inspection firewall, the LANCOM 1640E protects the entire network. This business router provides optimal protection against threats from the Internet with features such as intrusion prevention and Denial-of-Service protection.

Network virtualization with Advanced Routing & Forwarding

The LANCOM 1640E provides 2 securely isolated IP contexts, each of which has its own separate routing. This is an elegant way of operating IP applications on different networks while managing them on one central router.

Security Made in Germany

In a market with a strong presence of American and Asian products, LANCOM offers maximum security "Made in Germany". The entire LANCOM core product range is developed and manufactured in Germany and tested according to the highest standards of security, data protection and quality. The company's own "closed-source" operating system LCOS is developed at the company headquarters in Germany. Our own team of developers works

in a highly secure environment as certified by the BSI (German Federal Office for Information Security), which is subject to the highest standards of security, encryption, and quality throughout.

Maximum future-proofing

LANCOM products are based on professional expertise, years of experience in IT, and high-quality materials. All of our devices are equipped with hardware that is dimensioned for the future and, even reaching back to older product generations, updates to the LANCOM Operating System—LCOS—are available several times a year, free of charge. This guarantees a long service life while staying technically up to date, which represents a true protection of your investment.

LANCOM 1640E

LCOS 10.40

Layer 2 features	
VLAN	4.096 IDs based on IEEE 802.1q, dynamic assignment, Q-in-Q tagging
Multicast	IGMP-Snooping, MLD-Snooping
Protocols	ARP-Lookup, LLDP, ARP, Proxy ARP, BOOTP, DHCP
Layer 3 features	
Firewall	Stateful inspection firewall including packet filtering, extended port forwarding, N:N IP address mapping, packet tagging, support for DNS targets, user-defined rules and notifications
Quality of Service	Traffic shaping, bandwidth reservation, DiffServ/TOS, packet size control, layer-2-in-layer-3 tagging
Security	Intrusion Prevention, IP spoofing, access control lists, Denial of Service protection, detailed settings for handling reassembly, session-recovery, PING, stealth mode and AUTH port, URL blocker, password protection, programmable reset button
PPP authentication mechanisms	PAP, CHAP, MS-CHAP, and MS-CHAPv2
High availability / redundancy	VRRP (Virtual Router Redundancy Protocol), analog/GSM modem backup
Router	IPv4-, IPv6-, NetBIOS/IP multiprotocol router, IPv4/IPv6 dual stack
SD-WAN Application Routing	SD-WAN Application Routing in connection with the LANCOM Management Cloud
Router virtualization	ARF (Advanced Routing and Forwarding) up to separate processing of 2 contexts
IPv4 services	HTTP and HTTPS server for configuration by web interface, DNS client, DNS server, DNS relay, DNS proxy, dynamic DNS client, DHCP client, DHCP relay and DHCP server including autodetection, NetBIOS/IP proxy, NTP client, SNTP server, policy-based routing, Bonjour-Proxy, RADIUS
IPv6 services	HTTP and HTTPS server for configuration by web interface, DHCPv6 client, DHCPv6 server, DHCPv6 relay, DNS client, DNS server, dynamic DNS client, NTP client, SNTP server, Bonjour-Proxy, RADIUS
Dynamic routing protocols	RIPv2
IPv4 protocols	DNS, HTTP, HTTPS, ICMP, NTP/SNTP, NetBIOS, PPPoE (server), RADIUS, RADSEC (secure RADIUS), RTP, SNMPv1,v2c,v3, TFTP, TACACS+, IGMPv3
IPv6 protocols	NDP, stateless address autoconfiguration (SLAAC), stateful address autoconfiguration (DHCPv6), router advertisements, ICMPv6, DHCPv6, DNS, HTTP, HTTPS, PPPoE, RADIUS, SMTP, NTP, Syslog, SNMPv1,v2c,v3, MLDv2
WAN operating mode	VDSL, ADSL1, ADSL2 or ADSL2+ additional with external DSL modem at an ETH port
WAN protocols	PPPoE, Multi-PPPoE, ML-PPP, GRE, EoGRE, PPTP (PAC or PNS), L2TPv2 (LAC or LNS), L2TPv3 with Ethernet-Pseudowire and IPoE (using DHCP or no DHCP), RIP-1, RIP-2, VLAN, IPv6 over PPP (IPv6 and IPv4/IPv6 dual stack session), IP(v6)oE (autokonfiguration, DHCPv6 or static)
Tunneling protocols (IPv4/IPv6)	6to4, 6in4, 6rd (static and over DHCP), Dual Stack Lite (IPv4-in-IPv6-Tunnel)
Security	
Intrusion Prevention	Monitoring and blocking of login attempts and port scans
IP spoofing	Source IP address check on all interfaces: only IP addresses belonging to the defined IP networks are allowed
Access control lists	Filtering of IP or MAC addresses and preset protocols for configuration access
Denial of Service protection	Protection from fragmentation errors and SYN flooding
General	Detailed settings for handling reassembly, PING, stealth mode and AUTH port
Password protection	Password-protected configuration access can be set for each interface
Alerts	Alerts via e-mail, SNMP traps and SYSLOG
Authentication mechanisms	PAP, CHAP, MS-CHAP and MS-CHAPv2 as PPP authentication mechanism
Adjustable reset button	Adjustable reset button for 'ignore', 'boot-only' and 'reset-or-boot'
High availability / redundancy	
VRRP	VRRP (Virtual Router Redundancy Protocol) for backup in case of failure of a device or remote station.
FirmSafe	For completely safe software upgrades thanks to two stored firmware versions, incl. test mode for firmware updates
Analog/GSM modem backup	Optional operation of an analog or GSM modem at the serial interface

LANCOM 1640E

LCOS 10.40

High availability / redundancy	
Load balancing	Static and dynamic load balancing over up to 2 WAN connections. Channel bundling with Multilink PPP (if supported by network operator)
VPN redundancy	Backup of VPN connections across different hierarchy levels, e.g. in case of failure of a central VPN concentrator and re-routing to multiple distributed remote sites. Any number of VPN remote sites can be defined (the tunnel limit applies only to active connections). Up to 32 alternative remote stations, each with its own routing tag, can be defined per VPN connection. Automatic selection may be sequential, or dependant on the last connection, or random (VPN load balancing)
Line monitoring	Line monitoring with LCP echo monitoring, dead-peer detection and up to 4 addresses for end-to-end monitoring with ICMP polling
VPN	
IPSec over HTTPS	Enables IPSec VPN based on TCP (at port 443 like HTTPS) which can go through firewalls in networks where e. g. port 500 for IKE is blocked. Suitable for client-to-site connections and site-to-site connections. IPSec over HTTPS is based on the NCP VPN Path Finder technology
Number of VPN tunnels	Max. number of concurrent active IPSec, PPTP (MPPE) and L2TPv2 tunnels: 3. Unlimited configurable connections.
Hardware accelerator	Integrated hardware accelerator for 3DES/AES encryption and decryption
Realtime clock	Integrated, buffered realtime clock to save the date and time during power failure. Assures timely validation of certificates in any case
Random number generator	Generates real random numbers in hardware, e. g. for improved key generation for certificates immediately after switching-on
1-Click-VPN Client assistant	One click function in LANconfig to create VPN client connections, incl. automatic profile creation for the LANCOM Advanced VPN Client
1-Click-VPN Site-to-Site	Creation of VPN connections between LANCOM routers via drag and drop in LANconfig
IKE, IKEv2	IPSec key exchange with Preshared Key or certificate (RSA signature, ECDSA-Signature, digital signature)
Certificates	X.509 digital multi-level certificate support, compatible with Microsoft Server / Enterprise Server and OpenSSL. Secure Key Storage protects a private key (PKCS#12) from theft.
Certificate rollout	Automatic creation, rollout and renewal of certificates via SCEP (Simple Certificate Enrollment Protocol) per certificate hierarchy
Certificate revocation lists (CRL)	CRL retrieval via HTTP per certificate hierarchy
OCSP Client	Check X.509 certifications by using OCSP (Online Certificate Status Protocol) in real time as an alternative to CRLs
XAUTH	XAUTH client for registering LANCOM routers and access points at XAUTH servers incl. IKE-config mode. XAUTH server enables clients to register via XAUTH at LANCOM routers. Connection of the XAUTH server to RADIUS servers provides the central authentication of VPN-access with user name and password. Authentication of VPN-client access via XAUTH and RADIUS connection additionally by OTP token
RAS user template	Configuration of all VPN client connections in IKE ConfigMode via a single configuration entry
Proadaptive VPN	Automated configuration and dynamic creation of all necessary VPN and routing entries based on a default entry for site-to-site connections. Propagation of dynamically learned routes via RIPv2 if required
Algorithms	3DES (168 bit), AES-CBC and -GCM (128, 192 or 256 bit), Blowfish (128 bit), RSA (1024-4096 bit), ECDSA (P-256-, P-384-, P-521-curves), Chacha20-Poly 1305 and CAST (128 bit). OpenSSL implementation with FIPS-140 certified algorithms. MD-5, SHA-1, SHA-256, SHA-384 or SHA-512 hashes
NAT-Traversal	NAT-Traversal (NAT-T) support for VPN over routes without VPN passthrough
LANCOM Dynamic VPN	Enables VPN connections from or to dynamic IP addresses. The IP address is communicated via the ICMP or UDP protocol in encrypted form. Dynamic dial-in for remote sites via connection template
Dynamic DNS	Enables the registration of IP addresses with a Dynamic DNS provider in the case that fixed IP addresses are not used for the VPN connection
Specific DNS forwarding	DNS forwarding according to DNS domain, e.g. internal names are translated by proprietary DNS servers in the VPN. External names are translated by Internet DNS servers
Split DNS	Allows the selective forwarding of traffic for IKEv2 depending on the addressed DNS domain.
IPv4 VPN	Connecting private IPv4 networks
IPv4 VPN over IPv6 WAN	Use of IPv4 VPN over IPv6 WAN connections
IPv6 VPN	Connecting private IPv6 networks
IPv6 VPN over IPv4 WAN	Use of IPv6 VPN over IPv4 WAN connections

LANCOM 1640E

LCOS 10.40

VPN	
Radius	RADIUS authorization and accounting, outsourcing of VPN configurations in external RADIUS server in IKEv2, RADIUS CoA (Change of Authorization)
High Scalability VPN (HSVPN)	Transmission of multiple, securely separated networks within a VPN tunnel
IKEv2 EAP*	VPN clients can be authenticated with IKEv2 EAP against a central database like Microsoft Windows Server or RADIUS Server
*)	Only with VPN 25 option
Performance	
Routing-Performance	Data regarding the overall routing performance can be found inside the LANCOM tech paper "Routing-Performance" on www.lancom-systems.com
VoIP	
SIP ALG	The SIP ALG (Application Layer Gateway) acts as a proxy for SIP communication. For SIP calls the ALG opens the necessary ports for the corresponding media packets. Automatic address translation (STUN is no longer needed).
Interfaces	
WAN: Ethernet	10/100/1000 Mbps Gigabit Ethernet
Ethernet ports	3 individual 10/100/1000 Mbps Ethernet ports; up to 3 ports can be operated as additional WAN ports with load balancing. Ethernet ports can be electrically disabled within LCOS configuration. The ports support energy saving according to IEEE 802.3az
Port configuration	Each Ethernet port can be freely configured (LAN, DMZ, WAN, monitor port, off). LAN ports can be operated as a switch or separately. Additionally, external DSL modems or termination routers can be operated as a WAN port with load balancing and policy-based routing. DMZ ports can be operated with their own IP address range without NAT
USB 2.0 host port	USB 2.0 hi-speed host port for connecting USB printers (USB print server), serial devices (COM port server), USB data storage (FAT file system); bi-directional data exchange is possible
Serial interface	Serial configuration interface / COM port (8 pin Mini-DIN): 9,600 - 115,000 baud, suitable for optional connection of analog/GPRS modems. Supports internal COM port server and allows for transparent asynchronous transmission of serial data via TCP
Management and monitoring	
Management	LANCOM Management Cloud, LANconfig, WEBconfig, LANCOM Layer 2 management (emergency management)
Management functions	Alternative boot configuration, voluntary automatic updates for LCMS and LCOS, individual access and function rights up to 16 administrators, RADIUS and RADSEC user management, remote access (WAN or (W)LAN, access rights (read/write) adjustable separately), SSL, SSH, HTTPS, Telnet, TFTP, SNMP, HTTP, access rights via TACACS+, scripting, timed control of all parameters and actions through cron job
FirmSafe	Two stored firmware versions, incl. test mode for firmware updates
automatic firmware update	configurable automatic checking and installation of firmware updates
Monitoring	LANCOM Management Cloud, LANmonitor, WLANmonitor
Monitoring functions	Device SYSLOG, SNMPv1,v2c,v3 incl. SNMP-TRAPS, extensive LOG and TRACE options, PING and TRACEROUTE for checking connections, internal logging buffer for firewall events
Monitoring statistics	Extensive Ethernet, IP and DNS statistics; SYSLOG error counter, accounting information exportable via LANmonitor and SYSLOG
IPerf	IPerf is a tool for measurements of the bandwidth on IP networks (integrated client and server)
SLA-Monitor (ICMP)	Performance monitoring of connections
Netflow	Export of information about incoming and outgoing IP traffic
SD-LAN	SD-LAN – automatic LAN configuration via the LANCOM Management Cloud
SD-WAN	SD-WAN – automatic WAN configuration via the LANCOM Management Cloud
Hardware	
Power supply	12 V DC, external power adapter (230 V) with bayonet cap to protect against accidentally unplugging
Environment	Temperature range 5–40° C; humidity 0–95%; non-condensing
Housing	Robust synthetic housing, rear connectors, ready for wall mounting, Kensington lock; 210 x 45 x 140 mm (W x H x D)
Fans	None; fanless design without rotating parts, high MTBF
Power consumption (max)	Approx. 8.5 watt

LANCOM 1640E

LCOS 10.40

Declarations of conformity*	
CE	EN 60950-1, EN 55022, EN 55024
IPv6	IPv6 Ready Gold
Country of Origin	Made in Germany
*) Note	You will find all declarations of conformity in the products section of our website at www.lancom-systems.com
Scope of delivery	
Manual	Hardware Quick Reference (DE/EN), Installation Guide (DE/EN)
Cable	2 Ethernet cables, 3m
Power supply unit	External power adapter (230 V), NEST 12 V/2.0 A DC/S, coaxial power connector 2.1/5.5 mm bayonet, temperature range from -5 to +45° C, LANCOM item no. 111303 (EU)/LANCOM item no 110829 (UK)
Support	
Warranty	3 years support
Software updates	Regular free updates (LCOS operating system and LANtools) via Internet
Options	
LANCOM Content Filter	LANCOM Content Filter +10 user (additive up to 25), 1 year subscription, item no. 61590
LANCOM Content Filter	LANCOM Content Filter +25 user (additive up to 25), 1 year subscription, item no. 61591
LANCOM Content Filter	LANCOM Content Filter +10 user (additive up to 25), 3 year subscription, item no. 61593
LANCOM Content Filter	LANCOM Content Filter +25 user (additive up to 25), 3 year subscription, item no. 61594
LANCOM Warranty Basic Option S	Option to extend the manufacturer's warranty from 3 to 5 years, item no. 10710
LANCOM Warranty Advanced Option S	Option to extend the manufacturer's warranty from 3 to 5 years and replacement of a defective device, item no. 10715
LANCOM All-IP Lizenz Option	Upgrade option for the operation of the LANCOM routers with All-IP connections, support of PBX systems and telephony devices as well as voice & fax services, incl. Voice Call Manager, item no. 61419
LANCOM VoIP +10 Option	Upgrade for LANCOM VoIP router with 10 additional internal VoIP numbers (additionally up to 40) and 10 external SIP lines (additionally up to 55) item no. 61423
LANCOM Management Cloud	
LANCOM LMC-A-1Y LMC License	LANCOM LMC-A-1Y License (1 Year), enables the management of one category A device for one year via the LANCOM Management Cloud, item no. 50100
LANCOM LMC-A-3Y LMC License	LANCOM LMC-A-3Y License (3 Years), enables the management of one category A device for three years via the LANCOM Management Cloud, item no. 50101
LANCOM LMC-A-5Y LMC License	LANCOM LMC-A-5Y License (5 Years), enables the management of one category A device for five years via the LANCOM Management Cloud, item no. 50102
Accessories	
19" Rack Mount	19" rack mount adaptor, item no. 61501
19" Rack Mount	19" rack mount plus adaptor, item no. 61644
LANCOM Wall Mount	For simple, theft-proof mounting of LANCOM devices with plastic housings, item no. 61349
LANCOM Wall Mount (White)	For simple, theft-proof mounting of LANCOM devices with plastic housings, item no. 61345
LANCOM Serial Adapter Kit	For the connection of V.24 modems with AT command set and serial interface for the connection to the LANCOM COM interface, incl. serial cable and connection plug, item no. 61500
VPN Client Software	LANCOM Advanced VPN Client for Windows 7, Windows 8, Windows 8.1, Windows 10, single license, item no. 61600
VPN Client Software	LANCOM Advanced VPN Client for Mac OS X (10.5 Intel only, 10.6 or higher), single license, item no. 61606
Item number(s)	
LANCOM 1640E (EU)	61084


LANCOM 1640E

LCOS 10.40

Item number(s)

LANCOM 1640E (WW)

61085

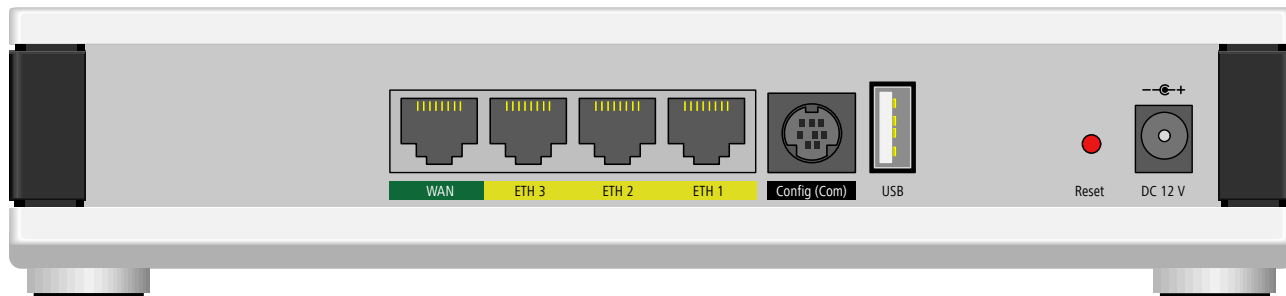

LANCOM, LANCOM Systems, LCOS, LANCommunity and Hyper Integration are registered trademarks. All other names or descriptions used may be trademarks or registered trademarks of their owners. This document contains statements relating to future products and their attributes. LANCOM Systems reserves the right to change these without notice. No liability for technical errors and/or omissions. 10/20